


Technical data




Data in accordance with EN 441. Gram reserves the right to alter specifications without notice as a result of product development.

		1407 CS			1807 CS			2207 CS		
		K	M	F	K	M	F	K	M	F
Temperature range	°C	+2/+12°	-5/+12°	-25/-5°	+2/+12°	-5/+12°	-25/-5°	+2/+12°	-5/+12°	-25/-5°
Refrigeration capacity at -10°C	Watt	386			386			386	719	
Refrigeration capacity at -25°C	Watt				614			614		
Energy consumption	kWh/24h	1,5	3,2	7,7	2,0	3,9	9,0	4,4	5,3	10,9
Electrical connection	V/Hz	230/50								
Connection load	Watt	310	350	580	310	319	580	310	361	670
Amperage	A	1,7	1,9	2,8	1,7	1,9	2,8	1,7	3,6	4,4
Climate class		5								
Refrigerant		R 290 (hydrocarbon)								
Insulation		50 mm (cyclopentane)								
Volume, gross	l	345			506			668		
Weight, gross	Kg	124			158			189		
Prep Top, weight, gros	Kg	146			188			226		

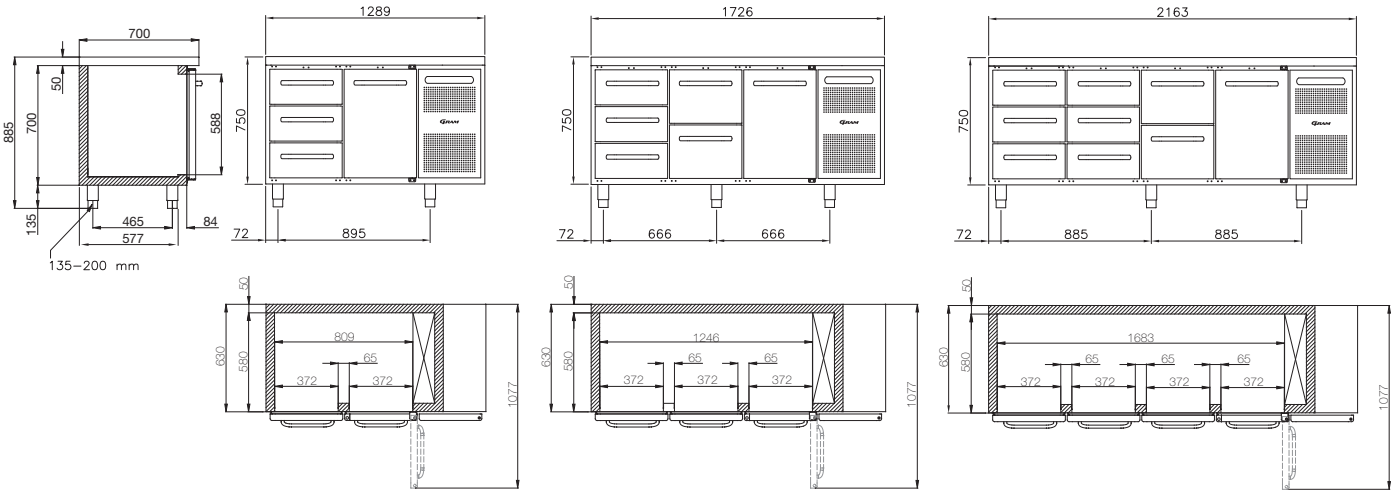

PREP TOP

Max. depth GN-pans: 150 mm

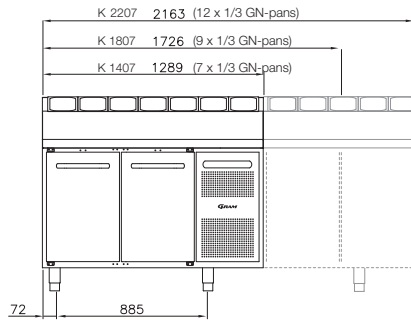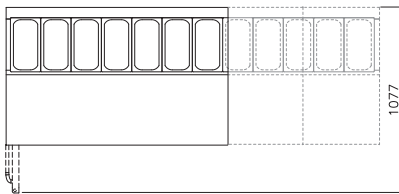

SALADETTE CUT OUT SIZES

